
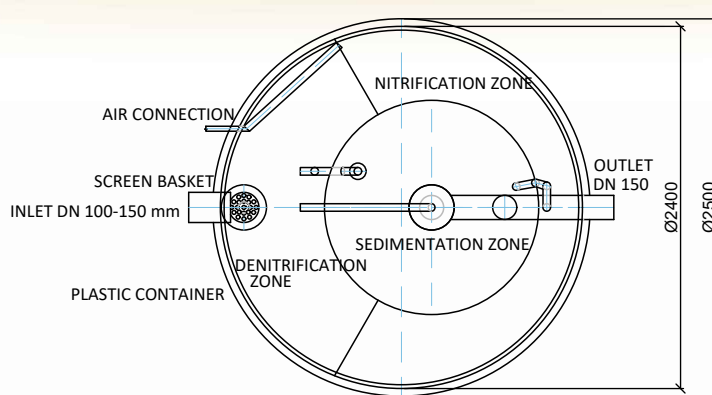


Drawing of waste water treatment plant BioCleaner® BC 25 PP

envis

pur


rethinking water

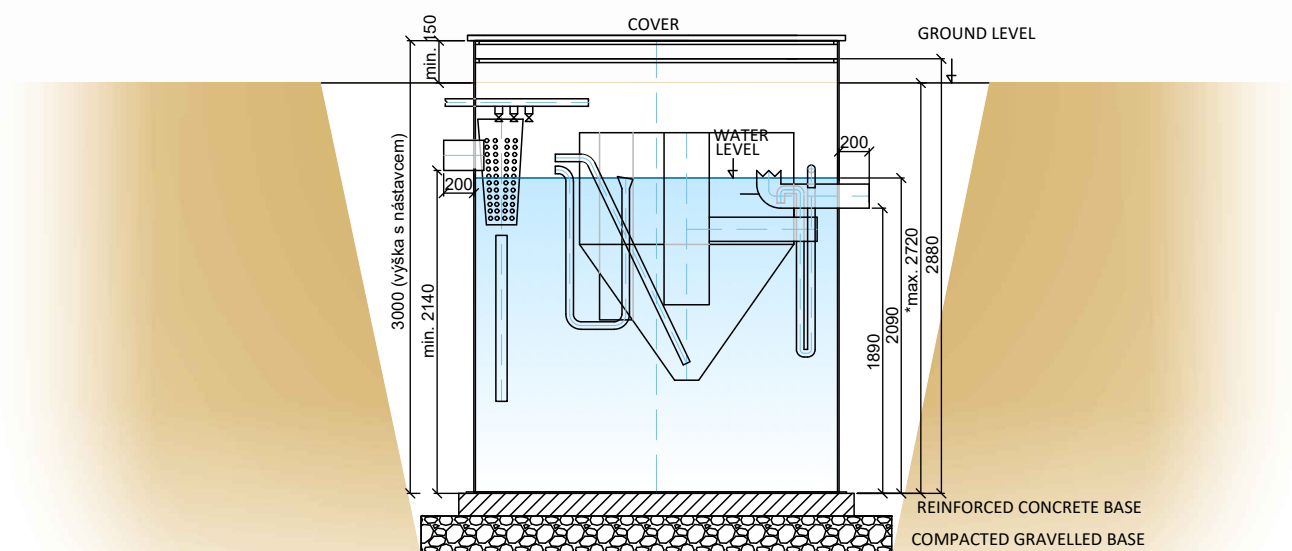

Note: Drawing of WWTP for backfill or concreting. Assembly make according to the Instruction for installation.

* In case the WWTP has to be installed deeper than maximal allowed dimension (see the drawing) or the soil load around the WWTP or underground water level is higher then we strongly recommend statically secure the WWTP tank (e.g. concreting).

Volume of denitrification zone	2.05 m ³	Maximum weight	470 kg
Volume of nitrification zone	4.97 m ³	Installed power	230 W
Volume of sedimentation zone	2.45 m ³	Voltage	230 V
Total volume	9.47 m ³	Protection of supply cable	13 A
Water level	2.09 m	Supply cable (max. 50 m)	CYKY-J 3x2.5

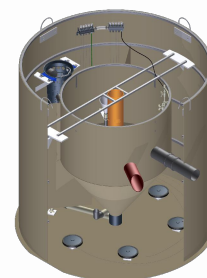

ENVI-PUR, s.r.o.
Na Vlčovce 13/4
CZ - 160 00 Praha 6, Czechia

Head office & production
Wilsonova 420
392 01 Soběslav



+420 381 203 211
info@envi-pur.cz
www.envi-pur.cz

Valid since: May 25th 2020

Prepared by: Josef Vítů